

# LPSW SERIES

## Single Speed Pneumatic Torque Gun

The pneumatic torque wrench is used in the working conditions that require precise and large-scale loading and unloading. The precise high-speed gearbox design can obtain stable and strong continuous output torque, which is suitable for a high-efficiency production environment.

- Maximized power-to-weight ratio
- Wide torque range for a variety of applications
- Advanced gearbox design for unmatched reliability
- Torque accuracy  $\pm 4\%$ , repeatability  $\pm 4\%$




LPSW15 and LPSW21 series Pneumatic Torque Wrench

LPSW tool includes a standard reaction arm. The special reaction arm can be custom-made.



LPSW34 , LPSW40 and LPSW80 series Pneumatic Torque Wrench

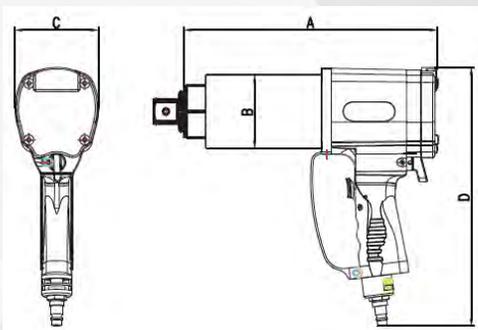

Type	SQ Size	Torque(N.m)		Speed RPM	Weight kg	Size A mm	Size B mm	Size C mm	Size D mm	Noise db
		Min	Max							
LPSW-15	0.75"	275	1400	15	3.5	207	70	31.5	261	80
LPSW-21	1"	400	2000	10	3.9	201	70	34.5	261	80
LPSW-34	1"	700	3400	4.8	7.0	269	89	38.5	272	85
LPSW-40	1"	700	4000	4.8	7.5	289	81	38.5	272	85
LPSW-80	1.5"	2700	8000	4.2	12.2	317	93	51	293	85

### Standard Accessories

- Standard Reaction Arm
- Circlip
- G1/2 Air Hose
- Air Gauge, FRL, Air Regulator
- Carry Basket
- Air - Torque Chart
- Operating Manual

